



Mini type, simple type cage clamp terminal blocks / 142 series

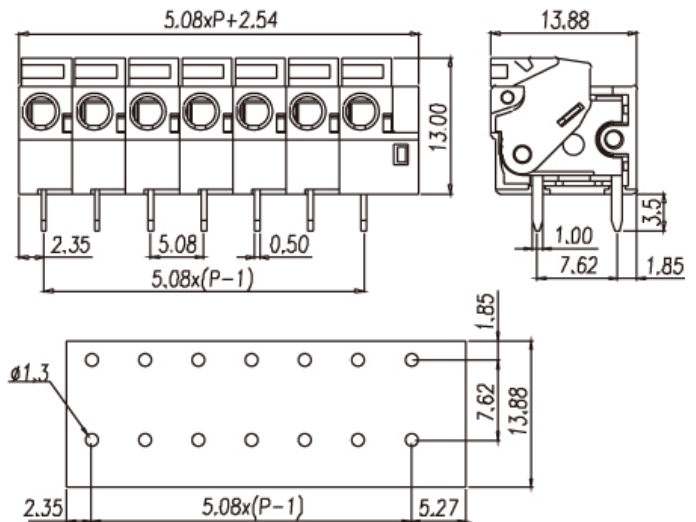

142R

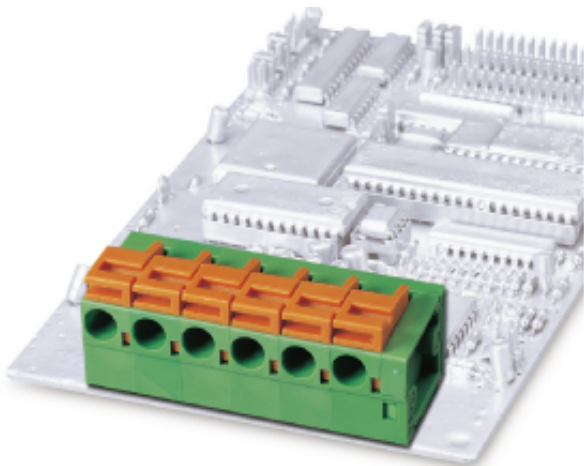

Pitch: 5.08mm

| | | |
|--------------------------------------|--------------------|-------|
| Approval | | |
| Technical Data | UL | IEC |
| Rated voltage | 300V | 450V |
| Rated current | 10A | 17.5A |
| Wire range | 1.5mm ² | |
| Solid wire (AWG) | 22~14 | |
| Stranded wire (AWG/mm ²) | 22~14 | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 / 2.5 / 4 KV | |
| Torque (Lb-in) | | |
| Screw | | |
| Wire strip length | 6~7mm | |
| Pole | Cat. No. | |
| 02 | 142R-02P | |
| : | : | |
| : | : | |
| 24 | 142R-24P | |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw